posirot®
Magnetic Angle Sensors

PRDS2

Angle sensor for standard industrial applications



- **Measurement range 0°... 360°**
- **Protection class IP67/IP69**
- **Diameter 36 mm, overall height 20 mm / 25 mm**
- **Contactless with external position magnet, wear-free**
-

Product versions

Incremental output

Digital output SSI

Digital output CANopen/SAE J1939 (optional redundant)



PRDS2 - Magnetic Angle Sensor

Version with Incremental output

Specifications

			Order options
Measurement range	0 ... 360°		
Resolution	1, 2, 3 ... 1024 pulses per revolution	1	**1, 2, 3 ... 1024**
Linearity	±1% (typical)		
Output	Incremental encoder output RS422 compatible output with excitation 5 V DC Incremental encoder output RS422 compatible output with excitation 8 ... 36 V DC Incremental encoder output HTL compatible output with excitation 8 ... 36 V DC DC	2	**RS5VF** **RS24VF** **HT24VF**
Rated distance sensor / magnet	Depending on the position magnet		
Connection	8-pin connector M12, axial 8-pin connector M12, radial Cable, standard length 2 m Deutsch connector, not shielded	3	**M12A8** **M12R8** **KAB2M**
Housing material	Aluminum		
Mounting	Clamps, mounting plate		
Protection class	IP67/IP69		
Shock	DIN EN 60068-2-27:2010, 100 g/11 ms, 100 shocks		
Vibration	DIN EN 60068-2-6:2008, 20 g 10 Hz-2 kHz, 10 cycles		
Temperature range	-40 ... +85°C		
Weight	50 g approx. (without cable)		
EMC	DIN EN 61326-1:2013		

Order code

PRDS2 – 1 – 2 – 3

Order example: PRDS2 – 1024 – RS24VF – M12A8

Accessories:

Connector cable (see page 25)

Position magnets (see from page 8)

Mounting (see page 13)

SSI



PRDS2 - Magnetic Angle Sensor
Version with Digital output SSI

Specifications

			Order options
Measurement range	0 ... 360°		
Output	Synchronous serial output with excitation 5 V DC Synchronous serial output with excitation 10 ... 36 V	1	**RSSI5V** **RSSI24V**
Code characteristics	Signal increasing CW, clockwise Signal increasing CCW, counterclockwise	2	**CW** **CCW**
Resolution	12 Bit (4096 steps) per revolution		
Linearity	±1% (typical)		
Rated distance sensor / magnet	Depending on the position magnet		
Connection	8-pin connector M12, axial 8-pin connector M12, radial Cable, standard length 2 m Deutsch connector, not shielded	3	**M12A8** **M12R8** **KAB2M**
Housing material	Aluminum		
Mounting	Clamps, mounting plate		
Protection class	IP67/IP69		
Shock	DIN EN 60068-2-27:2010, 100 g/11 ms, 100 shocks		
Vibration	DIN EN 60068-2-6:2008, 20 g 10 Hz-2 kHz, 10 cycles		
Temperature range	-40 ... +85°C		
Weight	50 g approx. (without cable)		
EMC	DIN EN 61326-1:2013		

Order code

PRDS2 – 1 – 2 – 3

Order example: PRDS2 – RSSI5V – CW – M12A8

Accessories:
Connector cable (see page 25)
Position magnets (see from page 8)
Mounting (see page 13)



PRDS2 - Magnetic Angle Sensor

Version with Digital output CANopen/SAE J1939 (optional redundant)

Specifications

			Order options
Measurement range	0 ... 360°		
Output	CANopen CAN SAE J1939 CANopen, redundant CAN SAE J1939, redundant	1	**CANOP** **CANJ1939** **CANOPR** **CANJ1939R**
Resolution	0.05° max.		
Linearity	±1% (typical)		
Rated distance sensor / magnet	Depending on the position magnet		
Housing material	Aluminum		
Mounting	Clamps, mounting plate		
Protection class	IP67/IP69		
Connection	5-pin connector M12 axial 5-pin connector M12 radial Deutsch connector, not shielded	2	**M12A5/CAN** **M12R5/CAN**
Shock	DIN EN 60068-2-27:2010, 100 g/11 ms, 100 shocks		
Vibration	DIN EN 60068-2-6:2008, 20 g 10 Hz-2 kHz, 10 cycles		
Temperature range	-40 ... +85°C		
Weight	50 g approx. (without cable)		
EMC	DIN EN 61326-1:2013		

Order code


PRDS2 – 1 – 2

Order example: PRDS2 – CANOP – M12A5/CAN

Accessories:
Connector cable (see page 26)
Position magnets (see from page 8)
Mounting (see page 13)

Dimensions


Connector M12, axial

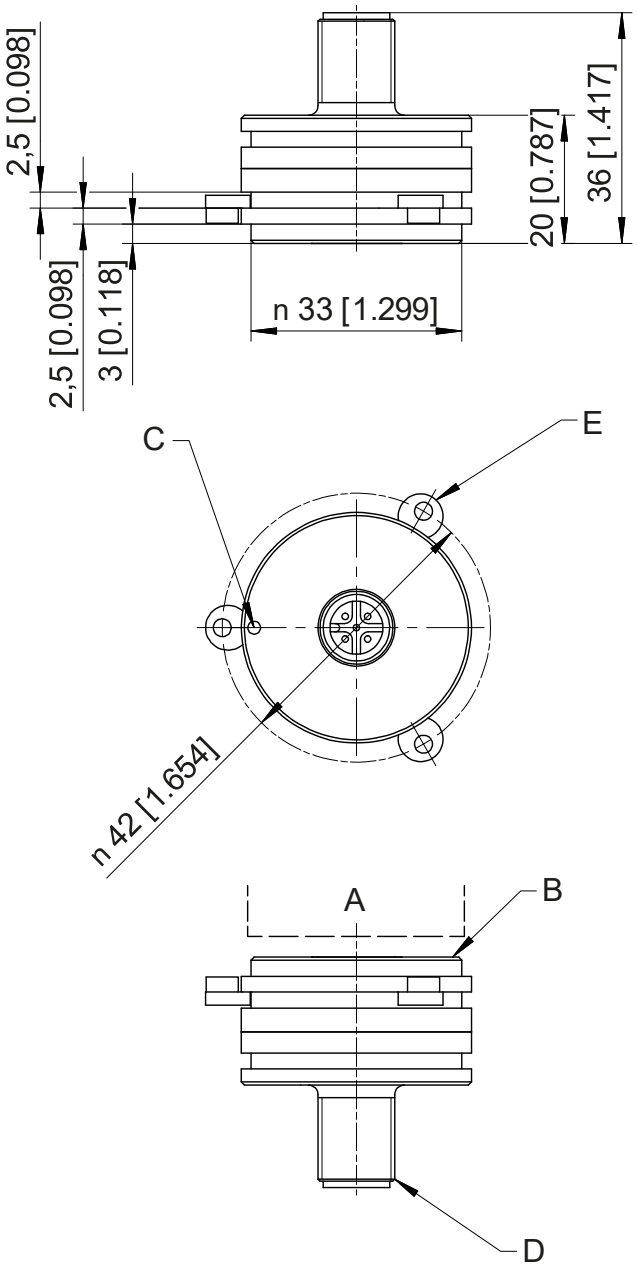



A – Position magnet
B – Measuring area
C – Marking
D – Connector M12
E – Mounting clamps PRPT-BFS1

Dimensions in mm [inch]. Weight approx. 50 g.
Dimensions informative only.
For guaranteed dimensions consult factory.

Connector M12, radial

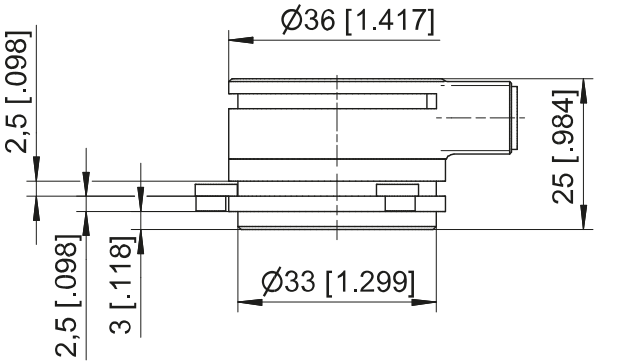

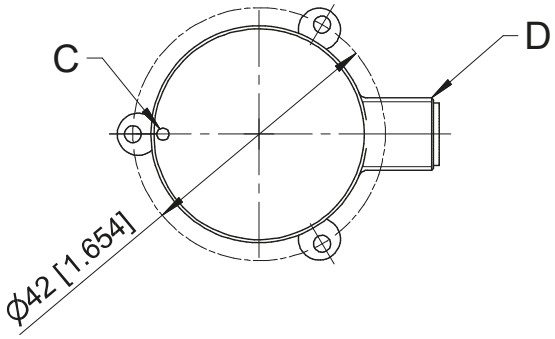


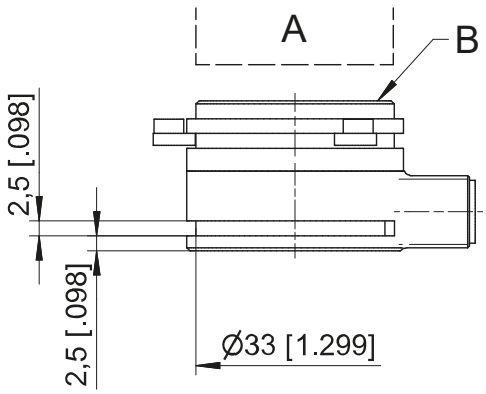

A – Position magnet
B – Measuring area
C – Marking
D – Connector M12

Dimensions in mm [inch]. Weight approx. 50 g.
Dimensions informative only.
For guaranteed dimensions consult factory.

Cable output

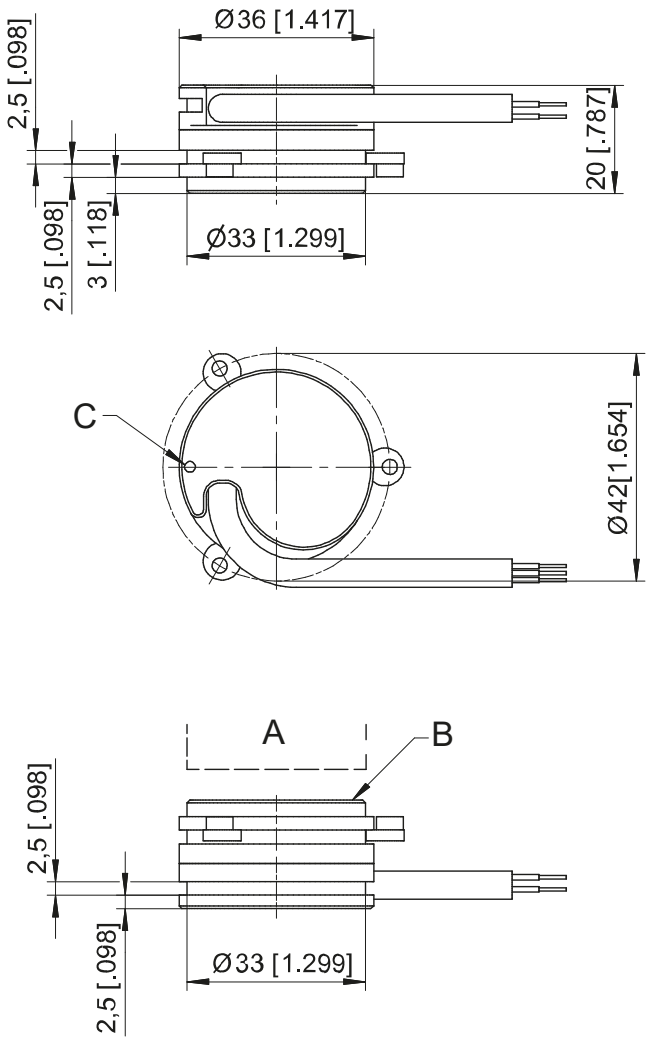


A – Position magnet
B – Measuring area
C – Marking
D – Mounting clamps PRPT-BFS1

Dimensions in mm [inch]. Weight without cable approx. 40 g.
Dimensions informative only.
For guaranteed dimensions consult factory.

Position magnets

PRMAG20

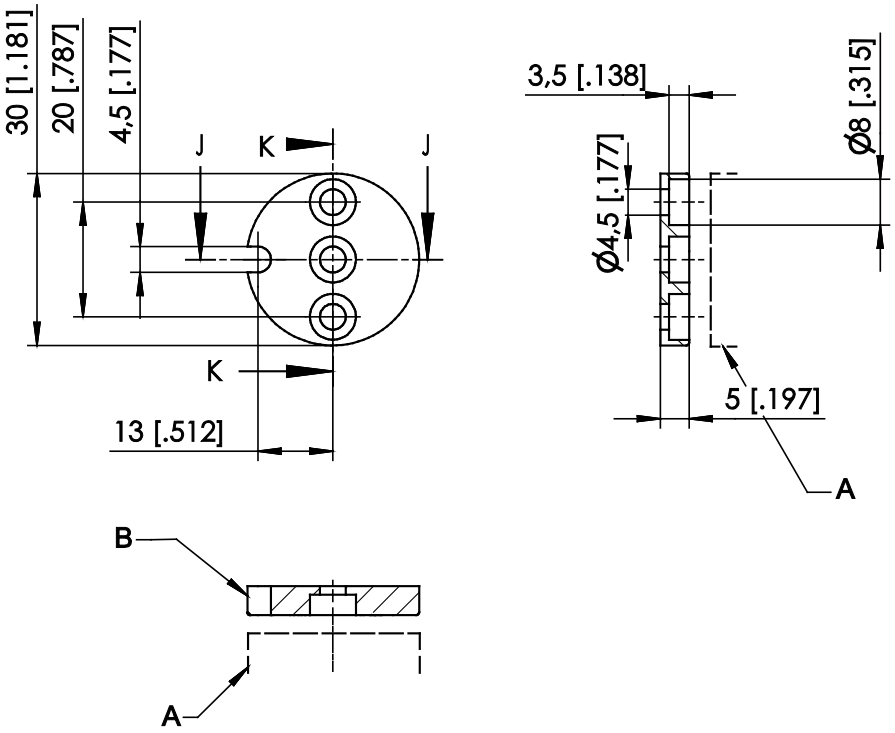


A – Sensor
B – Marking

Order code	Weight	Material	Moment of inertia
PRMAG20	approx. 12 g	zinc coated steel, plastic	1.3 kgmm^2

A misalignment of the position magnet has an effect on the linearity.

Dimensions in mm [inch].
Dimensions informative only.
For guaranteed dimensions please consult factory.

PRMAG21

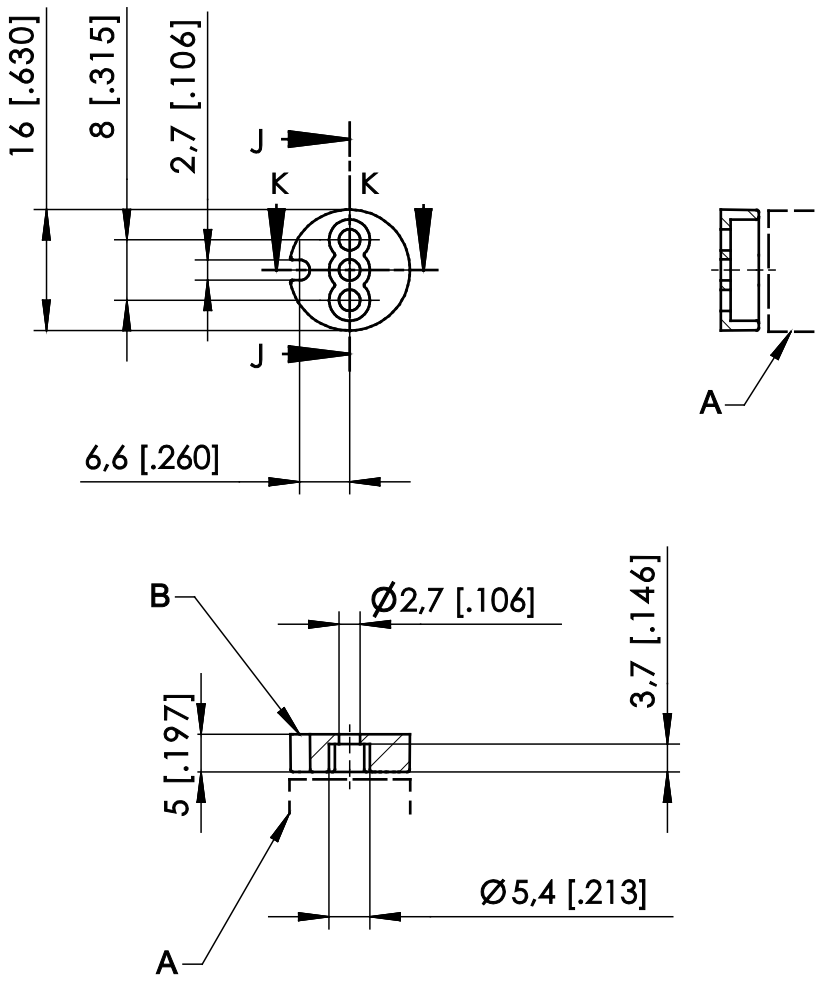


A – Sensor
B – Marking

Order code	Weight	Material	Moment of inertia
PRMAG21	approx. 3 g	zinc coated steel; plastic	0.1 kgmm^2

A misalignment of the position magnet has an effect on the linearity.

Dimensions in mm [inch]
Dimensions informative only.
For guaranteed dimensions please consult factory.

PRMAG22

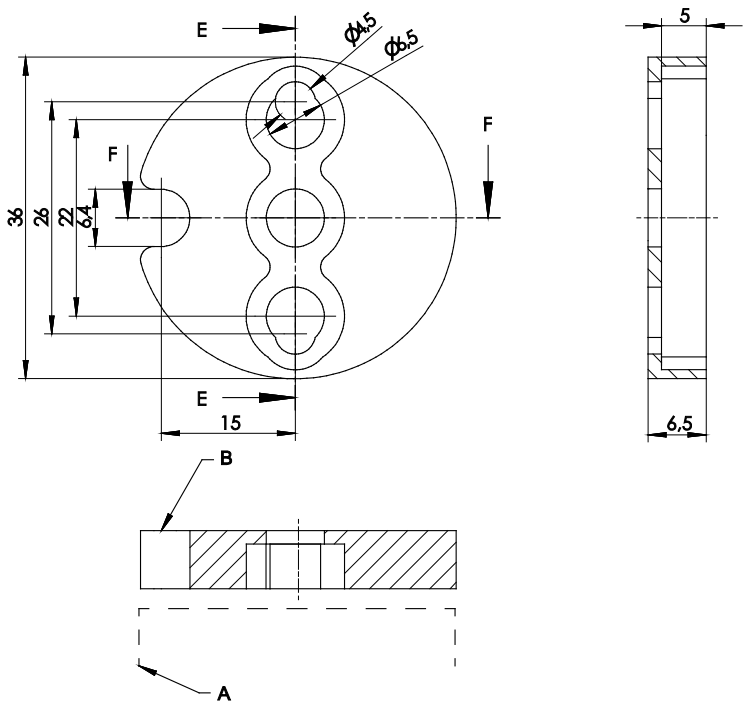


A – Sensor
B – Marking

Order code	Weight	Material	Moment of inertia
PRMAG22	approx. 19 g	zinc coated steel, plastic	3 kgmm^2

A misalignment of the position magnet has an effect on the linearity.

Dimensions in mm [inch].
Dimensions informative only
For guaranteed dimensions please consult factory.

PRMAG2-Z / PRMAG2-Z-VA

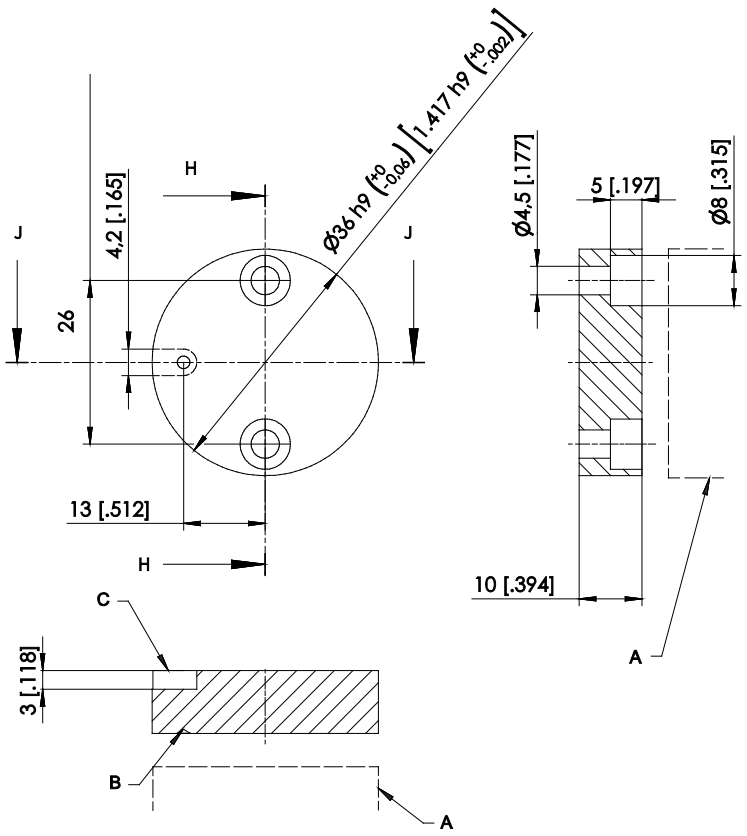


A – Sensor
B – Marking
C – Notch

Order code	Weight	Material	Moment of inertia
PRMAG2-Z	approx. 30 g	AlMgSi1	4.9 kgmm^2
PRMAG2-Z-VA	approx. 67 g	stainless steel EN 1.4404 (AISI 316L)	10.9 kgmm^2

A misalignment of the position magnet has an effect on the linearity.

Dimensions in mm [inch].
Dimensions informative only.
For guaranteed dimensions please consult factory.

Measuring error by misalignment of the position magnet




Air gap (a)
Parallelism (b)
Lateral offset (c)

Sensor	Position magnet	Air gap [mm]	Parallelism [°]	Error by lateral offset [°]					
				0.2 mm	0.5 mm	1 mm	2 mm	3 mm	4 mm
PRAS2 PRDS2	PRMAG20	0 ... 6	0 ... 5	0.15	0.4	0.8	2.2	5	–
	PRMAG21	0 ... 3.5	0 ... 5	0.2	0.4	1	3.8	10	–
	PRMAG22	0 ... 9	0 ... 5	0.1	0.4	1	2.2	4.5	8.0
	PRMAG2-Z-VA	0 ... 9	0 ... 5	0.1	0.2	0.6	1.5	4.5	8.5


Mounting plates

Mounting possibilities PRxS2


Mounting possibilities of PRxS2 sensors




Mounting clamp BFS1

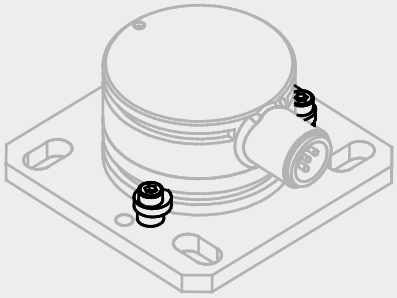


PRPT-BPL1 + PRPT-BFS1
(Mounting plates for screw mounting + mounting clamp)

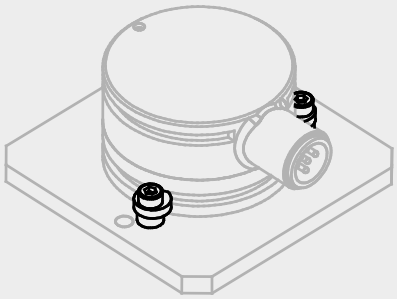

PRPT-BPL2 + PRPT-BFS1
(Mounting plates for welding assembly + mounting clamp)

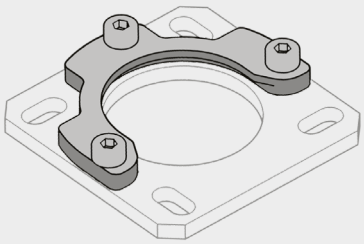


Mounting clamp BFS2

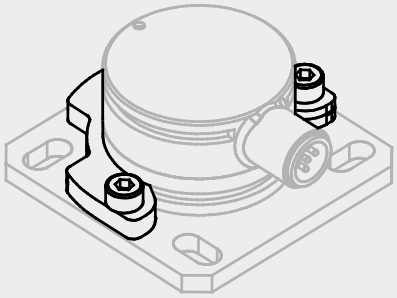

PRPT-BPL1 + PRPT-BFS2

(Mounting plates for screw mounting + mounting clamp)

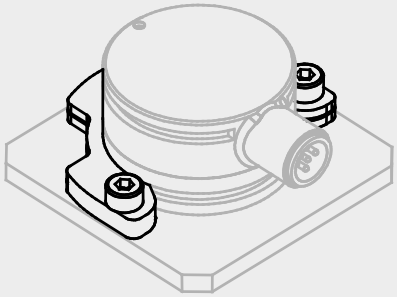


PRPT-BPL2 + PRPT-BFS2

(Mounting plates for welding assembly + mounting clamp)

PRPT-BPL1

(Screw mounting)

In combination with the mounting clamps PRPT-BFS1 (3 x M2.5) or in combination with the mounting bracket PRPT-BFS2 (3 x M4).

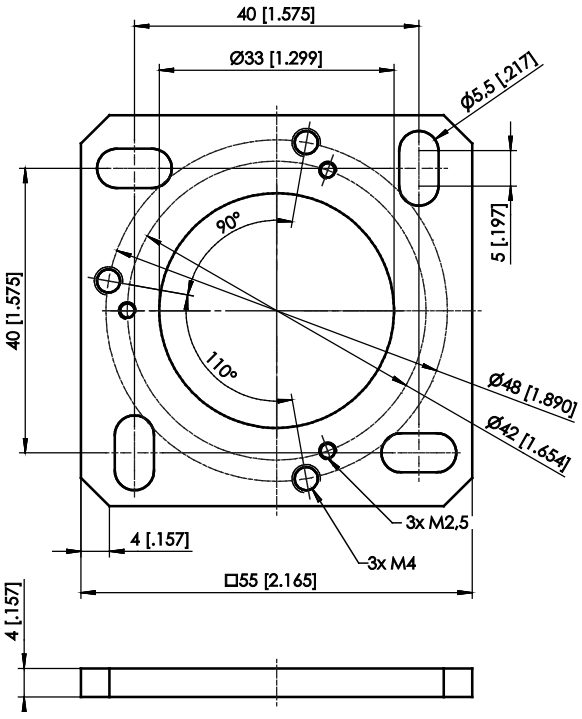

Dimensions in mm [inch].

Weight 30 g approx.


Dimensions informative only.

For guaranteed dimensions please consult factory.

PRPT-BPL2

(Welding assembly)

In combination with the mounting clamps PRPT-BFS1 (3 x M2.5) or in combination with the mounting bracket PRPT-BFS2 (3 x M4).

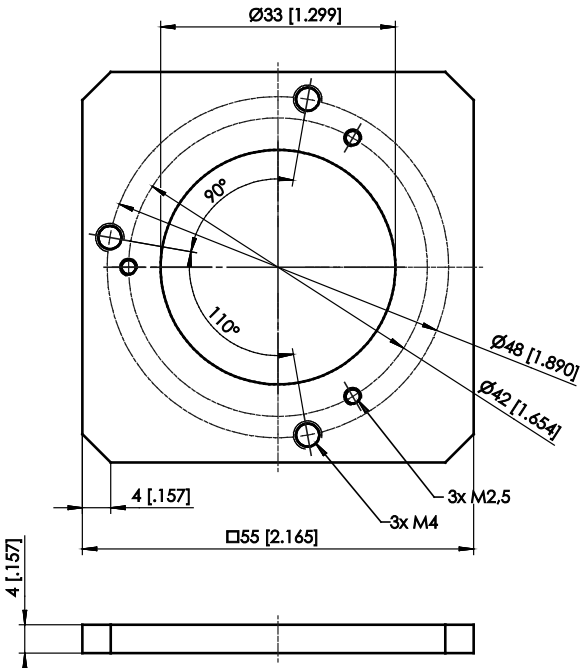

Dimensions in mm [inch].

Weight 30 g approx.

Dimensions informative only.


For guaranteed dimensions please consult factory.

Output specification

Incremental output

RS5VF /RS24VF Incremental	Interface	EIA RS-422
	Excitation voltage	RS5VF: 5 V DC ±10 % RS24VF: 8 ... 36 V DC
	Excitation current	100 mA max., depending on the load
	Max. pulse frequency	500 kHz
	Output signals	A, $\overline{A}$, B, $\overline{B}$, Z, $\overline{Z}$ Push-Pull
	Output current	10 mA max.
	Stability (temperature)	±50 x 10^{-6} / °C f.s. (typical)
	Operating temperature	-40 ... +85 °C
	Protection	Short circuit
	EMC	DIN EN 61326-1:2013


Output signals

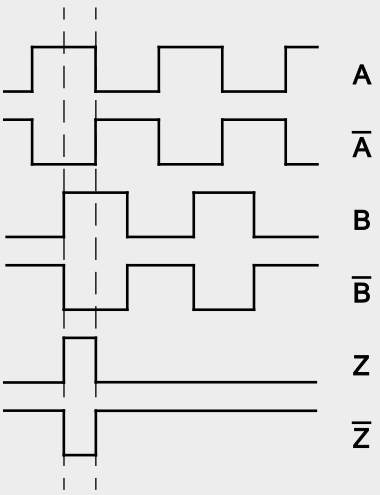

Pulse sequence for clockwise rotation CW in view of shaft or active front of sensor.

A zero impulse Z, $\overline{Z}$ is generated at the reference position.

Signal wiring
Connector M12, 8 pin




View to the sensor connector

Output signals	Connector pin no.	Cable color
Excitation +	1	white
Excitation GND	2	brown
A	4	yellow
$\overline{A}$	6	pink
B	3	green
$\overline{B}$	5	grey
Z	7	blue
$\overline{Z}$	8	red

HT24VF Incremental		
	Interface	HTL
	Excitation voltage	8 ... 36 V DC
	Excitation current	100 mA max., depending on the load
	Max. pulse frequency	500 kHz
	Output signals	A, $\overline{A}$, B, $\overline{B}$, Z, $\overline{Z}$ Push-Pull
	Output current	10 mA max.
	Stability (temperature)	±50 x 10^{-6} / °C f.s. (typical)
	Operating temperature	-40 ... +85 °C
	Protection	Short circuit
	EMC	DIN EN 61326-1:2013


Output signals

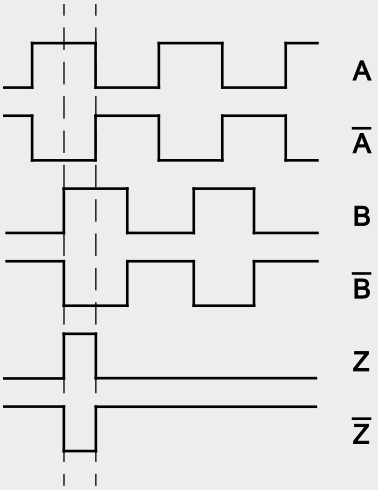

Pulse sequence for clockwise rotation CW in view of shaft or active front of sensor.

A zero impulse Z, $\overline{Z}$ is generated at the reference position.

Signal wiring
Connector M12, 8 pin




View to the sensor connector

Output signals	Connector pin no.	Cable color
Excitation +	1	white
Excitation GND	2	brown
A	4	yellow
$\overline{A}$	6	pink
B	3	green
$\overline{B}$	5	grey
Z	7	blue
$\overline{Z}$	8	red

SSI output


RSSI5V/RSSI24V Synchronous serial SSI SSI	Interface	EIA RS-422
	Excitation voltage	RSSI5V: 5 V DC ±10% RSSI24V: 10 ... 36 V DC
	Excitation current	100 mA max. without load
	Clock frequency	100 kHz ... 500 kHz
	Code	Gray-Code, continuous progression, 12 bit
	Delay between pulse trains	20 µs min.
	Stability (temperature)	±50 x 10^{-6} / °C f.s. (typical)
	Operating temperature	Refer to sensor specifications
	Protection	Short circuit
	EMC	EN 61326-1:2013

Data format
(Train of 13 pulses)

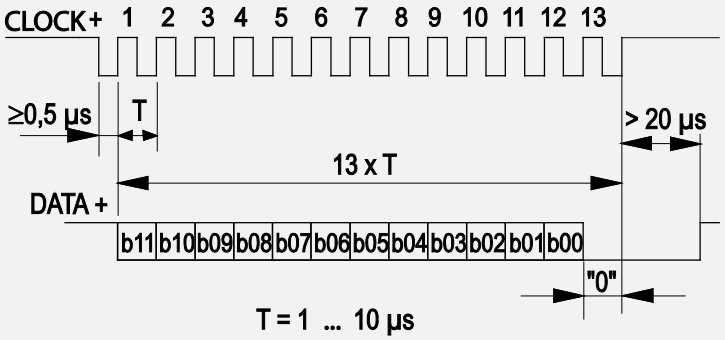

Transmission rate	**Cable length**	**Baud rate**	**Note:**
	50 m	100 - 1000 kHz	Extension of the cable length will reduce the maximum transmission rate. The signals CLOCK /$\overline{\text{CLOCK}}$ and DATA/$\overline{\text{DATA}}$ must be connected in a twisted pair cable, shielded in pairs, the pairs also commonly shielded.
	100 m	100 - 300 kHz	

Signal wiring
Connector M12, 8 pin



View to the sensor connector


Output signals	**Connector pin no.**	**Cable color**
Excitation +	1	white
Excitation GND	2	brown
CLOCK	3	green
$\overline{\text{CLOCK}}$	4	yellow
DATA	5	grey
$\overline{\text{DATA}}$	6	pink
-	7	blue
-	8	red

Digital output CANopen

CANOP CANopen CAN	CAN Specification	ISO 11898, Basic and Full CAN 2.0 B
	Communication profile	CANopen CiA 301 V 4.02, Slave
	Device profile	Encoder CiA 406 V 3.2
	Configuration services	Layer Setting Service (LSS), CiA Draft Standard 305 (transmission rate, node id)
	Error Control	Node Guarding, Heartbeat, Emergency Message
	Node ID	Default: 127; programmable via LSS or SDO
	PDO	3 TxPDO, 0 RxPDO, static mapping
	PDO Modes	Event-/Time triggered, Remote-request, Sync cyclic/acyclic
	SDO	1 server, 0 Client
	CAM	8 cams
	Certified	Yes
	Transmission rates	50 kBaud to 1 MBaud, default: 125 kBaud; programmable via LSS or SDO
	Bus connection	M12 connector, 5 pin
	Integrated bus terminating resistor	Adjustable by the customer
	Bus, galvanic isolated	No

Specifications	Excitation voltage	8 ... 36 V DC
	Excitation current	20 mA typical at 24 V DC 40 mA typical at 12 V DC, 80 mA max.
	Resolution	0.05° max.
	Stability (temperature)	±50 x 10^{-6}/°C f.s. (typical)
	Repeatability	1 LSB
	Operating temperature	See specification of the respective sensor
	Protection	Reverse polarity, short circuit
	Dielectric strength	1 kV (V AC, 50 Hz, 1 min.)
	EMC	DIN EN 61326-1:2013

Signal wiring
Connector M12, 5 pin




View to the sensor connector

Output signals	Connector pin no.	Cable color
Shield	1	brown
Excitation +	2	white
GND	3	blue
CAN-H	4	black
CAN-L	5	grey

CANOPR CANopen	CAN Specification	ISO 11898, Basic and Full CAN 2.0 B
	Communication profile	CANopen CiA 301 V 4.02, Slave
	Device profile	Encoder CiA 406 V 3.2
	Configuration services	Layer Setting Service (LSS), CiA Draft Standard 305 (transmission rate, node id)
	Error Control	Node Guarding, Heartbeat, Emergency Message
	Node ID	Default: 127 and 126; programmable via LSS or SDO
	PDO	3 TxPDO, 0 RxPDO, static mapping
	PDO Modes	Event-/Time triggered, Remote-request, Sync cyclic/acyclic
	SDO	1 server, 0 Client
	CAM	8 cams
	Certified	Yes
	Transmission rates	50 kBaud to 1 MBaud, default: 125 kBaud; programmable via LSS or SDO
	Bus connection	M12 connector, 5 pin
	Integrated bus terminating resistor	adjustable by the customer
	Bus, galvanic isolated	No

Specifications	Excitation voltage	8 ... 36 V DC
	Excitation current	40 mA typical at 24 V DC 80 mA typical at 12 V DC, 120 mA max.
	Measuring rate	1 kHz (asynchronous)
	Stability (temperature)	±50 x 10^{-6}/°C f.s. (typical)
	Repeatability	1 LSB
	Operating temperature	See specification of the respective sensor
	Protection	Reverse polarity, short circuit
	Dielectric strength	1 kV (V AC, 50 Hz, 1 min.)
	EMC	DIN EN 61326-1:2013

Signal wiring
Connector M12, 5 pin



View to the sensor connector

Output signals	Connector pin no.	Cable color
Shield	1	brown
Excitation +	2	white
GND	3	blue
CAN-H	4	black
CAN-L	5	grey

Digital output CAN SAE J1939


CANJ1939 SAE J1939 CAN	CAN Specification	ISO 11898, Basic and Full CAN 2.0 B	
	Transceiver	24V-compliant, not isolated	
	Communication profile	SAE J1939	
	Baud Rate	250 kbit/s	
	Internal termination resistor	adjustable by the customer	
	Address	Default 247d, configurable	

NAME Fields	Arbitrary address capable	1	Yes
	Industry group	0	Global
	Vehicle system	7Fh (127d)	Non specific
	Vehicle system instance	0	
	Function	FFh (255d)	Non specific
	Function instance	0	
	ECU instance	0	
	Manufacturer	145h (325d)	Manufacturer ID
	Identity number	0nnn	Serial number 21 bit

Parameter Group Numbers (PGN)	Configuration data	PGN EF00h	Proprietary-A (PDU1 peer-to-peer)
	Process data	PGN FFnnh	Proprietary-B (PDU2 broadcast); nn Group Extension (PS) configurable

Specifications	Excitation voltage	8 ... 36 V DC
	Excitation current	20 mA typical at 24 V DC 40 mA typical at 12 V DC 80 mA max.
	Measuring rate	1 kHz (asynchronous)
	Stability (temperature)	±50 x 10^{-6}/°C f.s. (typical)
	Repeatability	1 LSB
	Operating temperature	See specification of the respective sensor
	Protection	Reverse polarity, short circuit
	Dielectric strength	1 kV (V AC, 50 Hz, 1 min.)
	EMV	DIN EN 61326-1:2013

Signal wiring Connector M12, 5 pin	**Output signals**	**Connector pin no.**	**Cable color**
	Shield	1	brown
	Excitation +	2	white
	GND	3	blue
	CAN-H	4	black

 View to the sensor connector	CAN-L	5	grey


CANJ1939R CAN SAE J1939	CAN Specification	ISO 11898, Basic and Full CAN 2.0 B	
	Transceiver	24V-compliant, not isolated	
	Communication profile	SAE J1939	
	Baud Rate	250 kbit/s	
	Internal termination resistor	Adjustable by the customer	
	Address	Default 247d and 246d, configurable	

NAME Fields	Arbitrary address capable	1	Yes
	Industry group	0	Global
	Vehicle system	7Fh (127d)	Non specific
	Vehicle system instance	0	
	Function	FFh (255d)	Non specific
	Function instance	0	
	ECU instance	0	
	Manufacturer	145h (325d)	Manufacturer ID
	Identity number	0nnn	Serial number 21 bit

Parameter Group Numbers (PGN)	Configuration data	PGN EF00h	Proprietary-A (PDU1 peer-to-peer)
	Process data	PGN FFnnh	Proprietary-B (PDU2 broadcast); nn Group Extension (PS) configurable

Specifications	Excitation voltage	8 ... 36 V DC
	Excitation current	40 mA typical at 24 V DC 80 mA typical at 12 V DC 120 mA max.
	Measuring rate	1 kHz (asynchronous)
	Stability (temperature)	±50 x 10^{-6}/°C f.s. (typical)
	Repeatability	1 LSB
	Operating temperature	See specification of the respective sensor
	Protection	Reverse polarity, short circuit
	Dielectric strength	1 kV (V AC, 50 Hz, 1 min.)
	EMV	DIN EN 61326-1:2013

Signal wiring Connector M12, 5 pin	**Output signals**	**Connector pin no.**	**Cable color**
	Shield	1	brown
	Excitation +	2	white
	GND	3	blue
	CAN-H	4	black
	CAN-L	5	grey



View to the sensor connector


Accessories
Connector cable M12, 8 pin
(angular coupling)

shielded connector

The 8-lead shielded cable is supplied with a mating 8-pin 90° M12 connector at one end and 8 wires at the other end. Available lengths are 2 m, 5 m and 10 m.

Wire: cross sectional area 0.25 mm²

Cable diameter: 6.3 ±0.2 mm

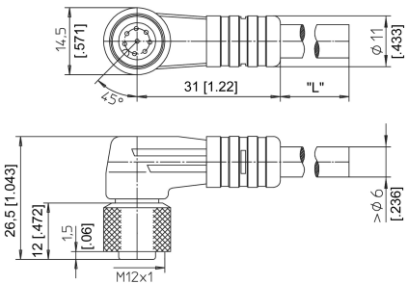

Order code

	KAB - xM - M12/8F/W - LITZE
IP69:	**KAB - xM - M12/8F/W/69K - LITZE**

xM = length in m


Connector cable M12, 8 pin
(straight coupling)

shielded connector

The 8-lead shielded cable is supplied with a mating 8-pin M12 connector at one end and 8 wires at the other end. Available lengths are 2 m, 5 m and 10 m.

Wire: cross sectional area 0.25 mm²

Cable diameter: 6.3 ±0.2 mm

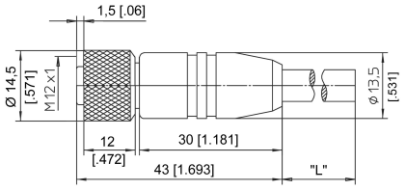

Order code

	KAB - xM - M12/8F/G - LITZE
IP69:	**KAB - xM - M12/8F/G/69K - LITZE**

xM = length in m

Signal wiring M12, 8 pin	**Plug connection / cable color**							
	1	2	3	4	5	6	7	8
	white	brown	green	yellow	grey	pink	blue	red

Applicable for cable carriers


Maximum movement speed	3 m/s
Maximum acceleration	5 m/s²
Minimum bending radius	10 x cable diameter

Connector/bus cable M12, 5 pin CAN-Bus

The 5-lead shielded cable is supplied with a female 5 pin M12 connector at one end and a male 5 pin M12 connector at the other end.

Available lengths are 0.3 m, 2 m, 5 and 10 m.

Cable diameter: 6.7 ±0.2 mm

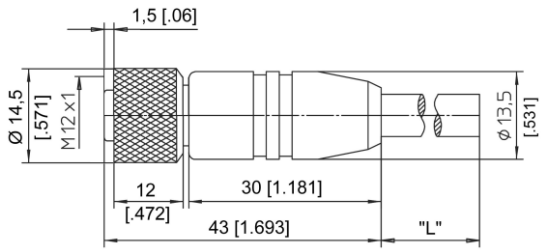

Order code

	KAB - xM - M12/5F/G - M12/5M/G - CAN
IP69:	**KAB - xM - M12/5F/G/69K - M12/5M/G/69K - CAN**

xM = length in m

Applicable for cable carriers

Maximum movement speed	3 m/s
Maximum acceleration	5 m/s^2
Minimum bending radius	10 x cable diameter

T-connector for bus cable M12, 5 pin CAN-Bus

Order code

KAB - TCONN - M12/5M - 2M12/5F - CAN



Terminating resistor M12, 5 pin CAN-Bus

Order code

KAB - RTERM - M12/5M/G - CAN

